


PNEUMATIC VALVES **UNIWORLD Series**

SINGLE SEAT TWO WAY – CONTROL VALVES

5000AD15100/E

01

2021

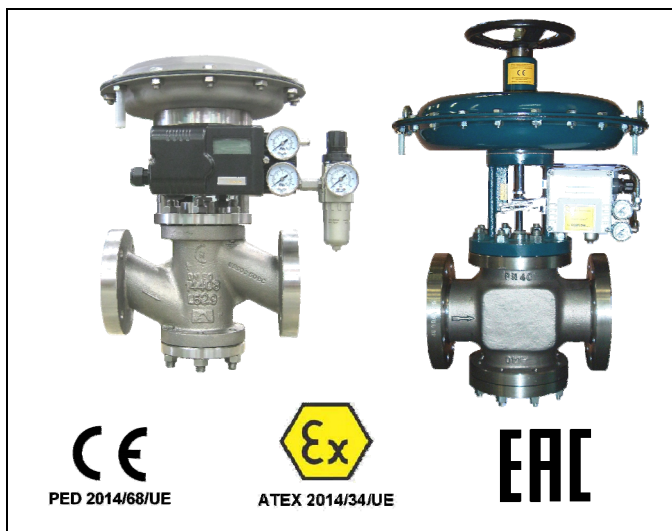

CE
PED 2014/68/UE

Ex
ATEX 2014/34/UE

EAC

SIZES : from DN 15 to DN 100

BODY CONNECTIONS : flanged EN 1092-1 form B PN16 PN40
flanged ANSI B 16.5 150 RF 300 RF
flanged JIS B2220 10K 20K

MATERIALS OF BODY GROUP (1) :

- **Cast iron EN-GJL-250 UNI EN 1561 PN 16 ANSI 150 JIS 10**
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- **Carbon steel ASTM A216 WCB PN16/40 ANSI 150/300 JIS10/20**
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- **Stainless steel AISI 316 CF8M PN16/40 ANSI 150/300 JIS10/20**
AISI 316 st. st. trim - AISI 316 st. st. bonnet

PLUG :

- **EQP (DN15-50) EQV (DN65-100)** = equal % class IV°
- **PL (DN15-50) LV (DN65-100)** = linear class IV°
- **PT (DN15-50) VPT (DN65-100)** = quick lift class IV°

BONNET (2) :

- **Standard** : -5 to +200 °C
- **Finned** : > +200 °C
- **Extended** : below -5 °C
- **Bellows sealed** : for thermal oil or hazardous media with
(PN 16 - 25 - 40) standard safety gland arrangement

GLAND ARRANGEMENT (PACKING) (3) with safety "0-rings" :

- PTFE 100% for temperatures ≤ +150 °C
- PTFE 85% + GRAPHITE 15% for temperatures ≤ +200 °C
- PURE GRAPHITE 100% for temperatures from +200° to +400 °C
to be used with finned bonnet

CV = american unit

(flowrate in USGPM with 1 psi of differential pressure)

PLUG	DN15	DN 20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
Full bore	Ø 1/2"	Ø 3/4"	Ø 1"	Ø 1.1/4"	Ø 1.1/2"	Ø 2"	Ø 2.1/2"	Ø 3"	Ø 4"
EQP	CV	3.4	6.6	10.8	17	23.8	50	70.2	118.5
	KV	2.9	5.7	9.3	14.7	20.5	43	60.5	102.1
PL	CV	3.4	6.6	11.2	17.6	23.9	51.2	72.7	123.8
	KV	2.9	5.7	9.6	15.2	20.6	44	62.7	106.7
PT	CV	3.4	6.6	12.1	19	24	52.7	107.3	175.4
	KV	2.9	5.7	10.4	16.4	20.7	45.3	92.5	111.5
Reduced bore *	•	•	1/2"	1/2"	3/4"	3/4"	1"	1"	1 1/4"
• DN 15-20	MFP 1/8"	MFP 3/16"	MFP 1/4"	MFP 3/8"	MFS1SG 1/4"	MFS2SG 1/4"	MFS1SG 3/8"	MFS2SG 3/8"	
CV	0.26	0.71	1.28	2.62	0.65	1.21	1.22	2.25	
KV	0.22	0.61	1.10	2.26	0.56	1.04	1.05	1.94	

MFP = Linear..MFS = Equal percentage

* CV and KV values are referred to the selected diameter and plug type (EQP/EQV-PL/LV only)

TYPE 5000 AD DN 15/100

Normally open – air closes

Face-to-face ASME / ANSI B16.10

DESCRIPTION

The "UNIWORLD" series type 5000 AD are equipped with "straight-through" pattern bodies having ANSI face-to-face dimensions and EN – ANSI – JIS flanges.

Modulating plug suitable for control of virtually all line media.

Compact construction assembled with multisprings pneumatic actuator having 3-15 psi ...6-30 psi standard control signals.

On request can be equipped with a pneumatic or electro-pneumatic pilot positioner and all accessories.

TECHNICAL CHARACTERISTICS OF PNEUMATIC ACTUATOR :

- Actuator : diaphragm type
- Control signals : 3-15 psi ... 6-30 psi
- Max air supply pressure : 35 psi (2.5 bar)
- Ambient temperature : -20 ... +70 °C *see on request
- Actuator casings material : Fe P11 carbon steel
- Diaphragm material : EPDM 70
- Yoke material : EN-GJS500-7 spheroidal cast iron
- Pneumatic connections : ISO 7 Rp – 1/8"

MAX WORKING CONDITIONS :

- Materials : see general data sheet UNIWORLD//E
- Valve Sizing : see general data sheet UNIWORLD//E
- Rangeability: see general data sheet UNIWORLD//E

ON REQUEST :

- PTFE/GR soft seal ≤+190°C class VI°
- PTFE soft seal ≤+150°C class VI°
- Lapping on seat and plug class V°
- Stellite (degree 6°) on seat and plug and guide bush
- Reduced bore (see below table)
- Pneumatic pilot positioner 3-15 psi...3-9 psi...9-15 psi
- Electro-pneumatic pilot positioner 4-20 mA...4-12 mA...12-20 mA
- Air filter regulator
- Proximity limit switches
- 3-way solenoid valve
- Lubricator on finned bonnet for temperatures ≥ +250 °C
- Top-work manual handwheel
- ATEX 2014/34/UE dedicated configuration according to the fluid
- Kit diaphragm and actuator seals certified for a.t. ≥ - 50 °C

Kv = metric unit

(flowrate in m3/h with 1 bar of differential pressure)

CONFLOW s.p.a.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED UNI EN ISO 9001


Via Lecco, 69/71
20864 AGRATE BRIANZA (MB)
Tel. 039/651.705 - 650.397
Mail: sales@conflow.it
www.conflow.it

Maximum permissible pressure drops in Kg/cm² (fluid opens) Strokes in mm – Signals in psi

Actuator type	Signal psi	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
		Stroke 11	Stroke 11	Stroke 11	Stroke 19	Stroke 19	Stroke 19	Stroke 28	Stroke 28	Stroke 28
T200	3-15 psi	12	8	5	3	-	-	-	-	-
	6-30 psi	52	32	18	11	-	-	-	-	-
T250	3-15 psi	27	17	9	6	4	2.4	-	-	-
	6-30 psi	113	69	39	25	17	10	-	-	-
T310	3-15 psi	-	-	15.5	10	7	3.5	2.5	1.7	0.9
	6-30 psi	-	-	63	41	28	16	10	7	4
T400	3-15 psi	-	-	-	14.5	10.5	5.5	3.8	2.5	1.4
	6-30 psi	-	-	-	60	42	24	15	10.5	5.9
T500	3-15 psi	-	-	-	24.5	17.5	9.5	6.2	4.2	2.4
	6-30 psi	-	-	-	101	70	40	25.3	17.5	9.9
T200 DN15-20 Microflow	Signal	MFP 1/8 "	MFP 3/16 "	MFP 1/4 "	MFP 3/8 "	MFS1SG 1/4 "	MFS2SG 1/4 "	MFS1SG 3/8 "	MFS2SG 3/8 "	
	3-15 psi	200	90	50	30	50	50	30	30	
	6-30 psi	1080	470	270	130	270	270	130	130	

1. The values given are referred to the force of actuator and they can be used within the limit of the body rating
2. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) given in the column 3-15 psi are obtained with a thrust of 18 psi
3. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) given in the column 6-30 psi are obtained with a thrust of 30 psi
4. The actuator DELTA-PI given in the column 6-30 psi are also valid for ON-OFF service with air supply at 30/35 psi

COMPONENTS LIST AND MATERIALS

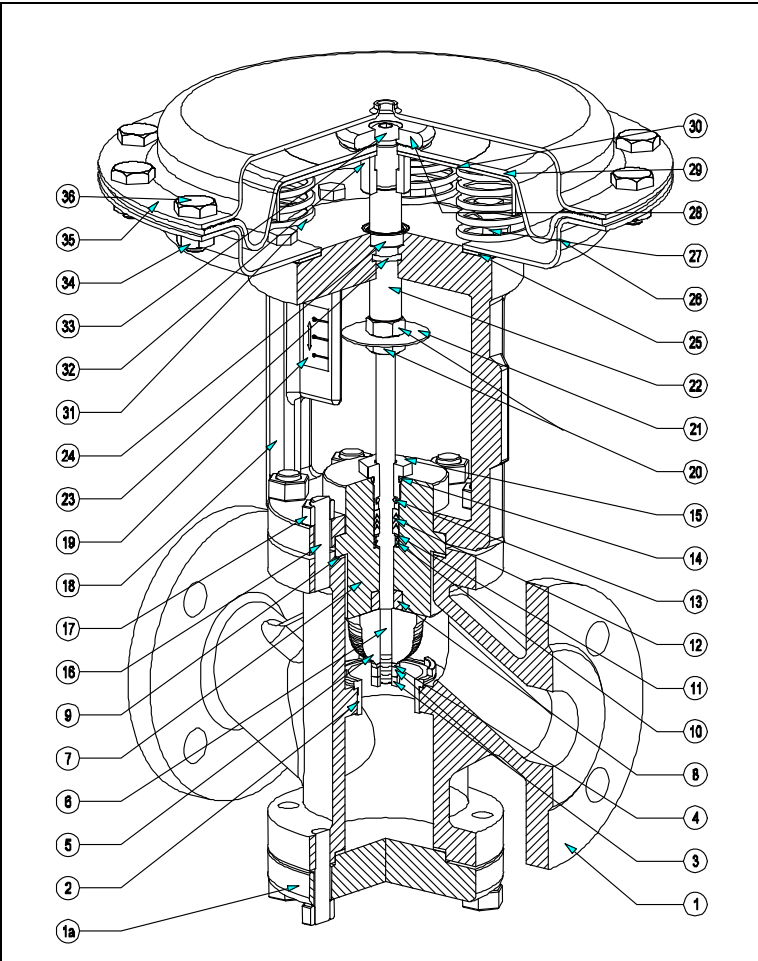		COMPONENTS LIST	MATERIALS
	1	Body	1. See note (1) at page 1
	1a	Bottom flange	1a. C40 carbon steel
	2	Seat	2. AISI 316 stainless steel
	3	Plug locknuts	3. AISI 304 stainless steel
	4	Spring washer	4. AISI 304 stainless steel
	5	Plug	5. AISI 316 stainless steel
	6	Stem	6. AISI 316 stainless steel
	7	Bonnet	7. See note (1)-(2) at page 1
	8	Guide bush	8. AISI 304 stainless steel
	9	Body gasket	9. Europil WS 3640 or PTFE
	10	Packing spring	10. AISI 302 stainless steel
	11	Packing washer	11. AISI 304 stainless steel
	12	Packing rings	12. See note (3) at page 1
	13	Internal "O" ring	13. Viton FPM 70
	14	External "O" ring	14. Viton FPM 70
	15	Packing adjusting nut	15. AISI 303 stainless steel
	16	Stud-bolts	16. Galvanized steel
	17	Body locknuts	17. DIN 934 galvanized steel
	18	Yoke	18. GGG50 spheroidal c. iron
	19	Travel indicator plate	19. Polycarbonate
	20	Position indicator locknuts	20. DIN 936 galvanized steel
	21	Position indicator	21. Aluminium
	22	Diaphragm rod	22. AISI 303 stainless steel
	23	"O" ring	23. NBR
	24	Airtight	24. NBR
	25	Yoke gasket	25. Cork – rubber
	26	Lower diaphragm casing	26. P11 steel
	27	Lower diaphragm casing internal bolts	27. DIN 933 galvanized steel
	28	Diaphragm spacer	28. Galvanized steel
	29	Diaphragm	29. EPDM 70
	30	Diaphragm plate	30. P01 steel
	31	Springs	31. C98 UNI 3823
	32	Diaphragm bush	32. AISI 303 stainless steel
	33	Diaphragm locknut	33. ISO 7380 galvanized steel
	34	Diaphragm casing bolts	34. DIN 934 galvanized steel
	35	Upper diaphragm casing	35. P11 steel
	36	Diaphragm casing locknuts	36. DIN 933 galvanized steel

DIMENSIONS in mm.

DN	Ø	A(1)	A(2)	B	C – Bonnet			D	V	V1	Actuator	E	Ø F
					Std	Finned	Bellows						
15	1/2 "	184	190	67	49	181	181	147	166	11	200	70	210
20	3/4 "	184	194	67	58	190	190	147	166	11	250	70	292
25	1 "	184	197	90	68	200	200	147	166	11	310	95	336
32	1.1/4 "	200	212	92	70	202	202	147	166	19	400	119	408
40	1.1/2 "	222	235	108	82	214	214	160	166	19	500	119	520
50	2 "	254	267	108	86	218	218	160	166	19			
65	2.1/2 "	276	292	148	111	309	309	160	166	28			
80	3 "	298	317	148	135	333	333	160	166	28			
100	4 "	352	368	176	160	363	363	204	166	28			

A(1) cast iron = PN16 – ANSI150 – JIS10K

A(2) carbon and st. steel = PN16 – PN40 – ANSI150 – ANSI300 – JIS10K – JIS20K

Specifications given are only indicative and not binding for the manufacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflow.it.

PNEUMATIC VALVES **UNIWORLD Series**

SINGLE SEAT TWO WAY – CONTROL VALVES

5000AD15100/E	
01	2021



TYPE **5000 AD** DN 125/200

Normally open – air closes

Face-to-face ASME / ANSI B16.10

DESCRIPTION

The "UNIWORLD" series type 5000 AD are equipped with "straight-through" pattern bodies having ANSI face-to-face dimensions and EN – ANSI – JIS flanges. Modulating plug suitable for control of virtually all line media. Compact construction assembled with multisprings pneumatic actuator having 3-15 psi ...6-30 psi standard control signals. On request can be equipped with a pneumatic or electro-pneumatic pilot positioner and all accessories.

SIZES : from DN 125 to DN 200

BODY CONNECTIONS : flanged EN 1092-1 form B PN16 PN40
flanged ANSI B 16.5 150 RF 300 RF
flanged JIS B2220 10K 20K

MATERIALS OF BODY GROUP (1) :

- Cast iron EN-GJL-250 UNI EN 1561 PN 16 ANSI 150 JIS 10
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- Carbon steel ASTM A216 WCB PN16/40 ANSI 150/300 JIS10/20
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- Stainless steel AISI 316 CF8M PN16/40 ANSI 150/300 JIS10/20
AISI 316 st. st. trim - AISI 316 st. st. bonnet

PLUG :

- EQV = equal % class IV°
- LV = linear class IV°
- VPT = quick lift class IV°

BONNET (2) :

- Standard : -5 to +200 °C
- Finned : > +200 °C
- Extended : below -5 °C
- Bellows sealed : for thermal oil or hazardous media with
(PN 16 - 25 - 40) standard safety gland arrangement

GLAND ARRANGEMENT (PACKING) (3) with safety "0-rings" :

- PTFE 100% for temperatures ≤ +150 °C
- PTFE 85% + GRAPHITE 15% for temperatures ≤ +200 °C
- PURE GRAPHITE 100% for temperatures from +200° to +400 °C
to be used with finned bonnet

CV = american unit

(flowrate in USGPM with 1 psi of differential pressure)

PLUG		DN125		DN150		DN200	
Full bore		Ø 5"		Ø 6"		Ø 8"	
EQV	CV	234.5		326.1		538	
	KV	202.1		281.1		463.7	
LV	CV	319.1		391.3		624.5	
	KV	275		337.3		538.3	
VPT	CV	355.3		429.8		658.6	
	KV	306.3		370.5		567.7	
Reduced bore *		3"	4"	4"	5"	5"	6"

* CV and KV values are referred to the selected diameter and plug type

TECHNICAL CHARACTERISTICS OF PNEUMATIC ACTUATOR :

- Actuator : diaphragm type
- Control signals : 3-15 psi ... 6-30 psi
- Max air supply pressure : 35 psi (2,5 bar)
- Ambient temperature : -20 ... +70 °C *see on request
- Actuator casings material : Fe P11 carbon steel
- Diaphragm material : EPDM 70
- Yoke material : EN-GJS500-7 spheroidal cast iron
- Pneumatic connections : ISO 7 Rp – 1/8"

MAX WORKING CONDITIONS :

- Materials : see general data sheet UNIWORLD/I/E
- Valve Sizing : see general data sheet UNIWORLD/I/E
- Rangeability: see general data sheet UNIWORLD/I/E

ON REQUEST :

- PTFE/GR soft seal ≤ +190°C class VI°
- PTFE soft seal ≤ +150°C class VI°
- Lapping on seat and plug class V°
- Stellite (degree 6°) on seat and plug and guide bush
- Reduced bore (see below table)
- Pneumatic pilot positioner 3-15 psi...3-9 psi...9-15 psi
- Electro-pneumatic pilot positioner 4-20 mA...4-12 mA...12-20 mA
- Air filter regulator
- Proximity limit switches
- 3-way solenoid valve
- Lubricator on finned bonnet for temperatures ≥ +250 °C
- Top-work manual handwheel
- ATEX 2014/34/UE dedicated configuration according to the fluid
- Kit diaphragm and actuator seals certified for a.t. ≥ -50 °C

Kv = metric unit

(flowrate in m3/h with 1 bar of differential pressure)

CONFLOW s.p.a.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED UNI EN ISO 9001


Via Lecco, 69/71
20864 AGRATE BRIANZA (MB)
Tel. 039/651.705 - 650.397
Mail: sales@conflow.it
www.conflow.it

Maximum permissible pressure drops in Kg/cm2 (fluid opens) Strokes in mm – Signals in psi

Actuator type	Signal psi	DN125	DN150	DN200
		Stroke 50	Stroke 50	Stroke 50
T400	3-15 psi	0.9	0.65	0.35
	6-30 psi	3.8	2.6	1.5
T500	3-15 psi	1.55	1.1	0.95
	6-30 psi	6.4	4.5	2.5

1. The values given are referred to the force of actuator and they can be used within the limit of the body rating
2. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) given in the column 3-15 psi are obtained with a thrust of 18 psi
3. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) given in the column 6-30 psi are obtained with a thrust of 30 psi
4. The actuator DELTA-PI given in the column 6-30 psi are also valid for ON-OFF service with air supply at 30/35 psi

COMPONENTS LIST AND MATERIALS

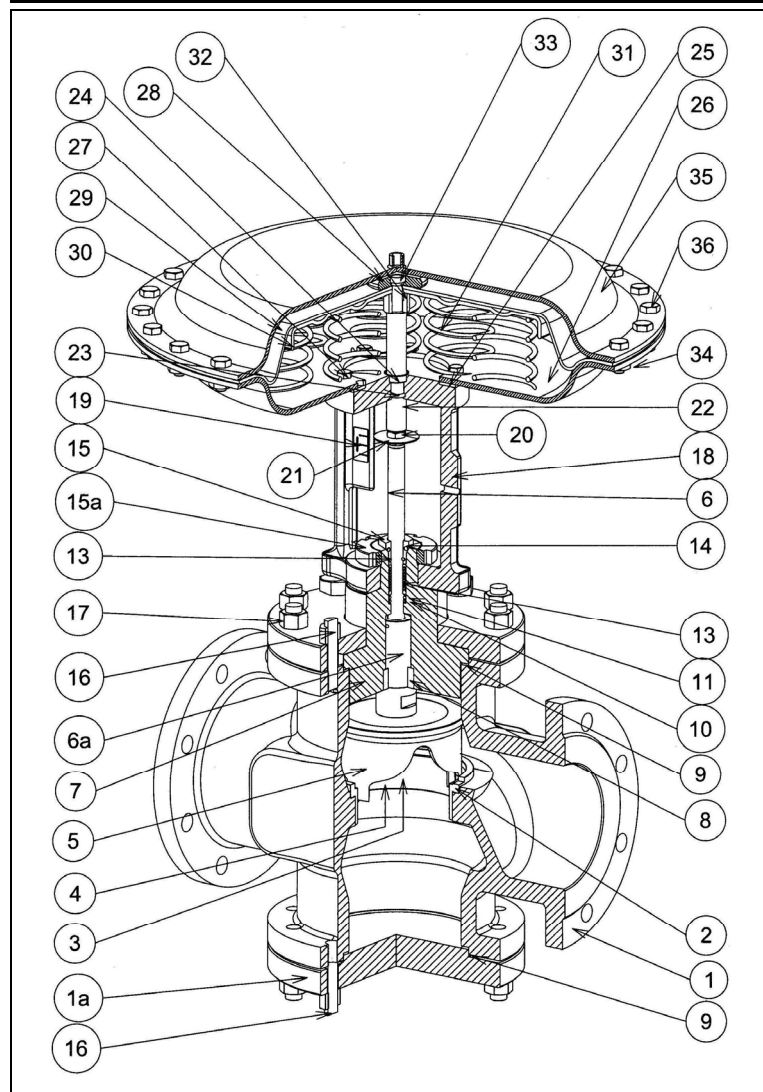


COMPONENTS LIST

1. Body
- 1a. Bottom flange
2. Seat
3. Plug locknuts
4. Spring washer
5. Plug
6. Stem
- 6a. Stem joint
7. Bonnet
8. Guide bush
9. Body gasket
10. Packing spring
11. Packing washer
12. Packing rings
13. Internal "O" ring
14. External "O" ring
15. Packing adjusting nut
- 15a. Yoke adjusting nut
16. Stud-bolts
17. Body locknuts
18. Yoke
19. Travel indicator plate
20. Position indicator locknuts
21. Position indicator
22. Diaphragm rod
23. "O" ring
24. Airtight
25. Yoke gasket
26. Lower diaphragm casing
27. Lower diaphragm casing internal bolts
28. Diaphragm spacer
29. Diaphragm
30. Diaphragm plate
31. Springs
32. Diaphragm bush
33. Diaphragm locknut
34. Diaphragm casing bolts
35. Upper diaphragm casing
36. Diaphragm casing locknuts

MATERIALS

1. See note (1) at page 1
- 1a. C40 carbon steel
2. AISI 316 stainless steel
3. AISI 304 stainless steel
4. AISI 304 stainless steel
5. AISI 316 stainless steel
6. AISI 316 stainless steel
- 6a. AISI 316 stainless steel
7. See note (1)-(2) at page 1
8. AISI 304 stainless steel
9. Europil WS 3640 or PTFE
10. AISI 302 stainless steel
11. AISI 304 stainless steel
12. See note (3) at page 1
13. Viton FPM 70
14. Viton FPM 70
15. AISI 303 stainless steel
- 15a. Steel Class 6
16. Galvanized steel
17. DIN 934 galvanized steel
18. GGG50 spheroidal c. iron
19. Polycarbonate
20. DIN 936 galvanized steel
21. Aluminium
22. AISI 303 stainless steel
23. NBR
24. NBR
25. Cork – rubber
26. P11 steel
27. DIN 933 galvanized steel
28. Galvanized steel
29. EPDM 70
30. P01 steel
31. C98 UNI 3823
32. AISI 303 stainless steel
33. ISO 7380 galvanized steel
34. DIN 934 galvanized steel
35. P11 steel
36. DIN 933 galvanized steel

DIMENSIONS in mm.

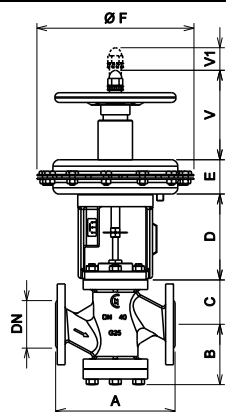

DN	Ø	A(1)	A(2)	B	C – Bonnet			D	V	V1
					Std	Finned	Bellows			
125	5 "	403	425	223	252	435	435	213	166	50
150	6 "	450	473	229	258	442	442	213	166	50
200	8 "	543	568	254	283	465	465	213	166	50

A(1) cast iron = PN16 – ANSI150 – JIS10K

A(2) carbon and st. steel = PN16 – PN40 – ANSI150 – ANSI300 – JIS10K – JIS20K

Specifications given are only indicative and not binding for the manufacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflo.it.

Actuator	E	Ø F
400	119	408
500	119	520


PNEUMATIC VALVES **UNIWORLD Series**

SINGLE SEAT TWO WAY – CONTROL VALVES

5000AR15100/E

01

2021

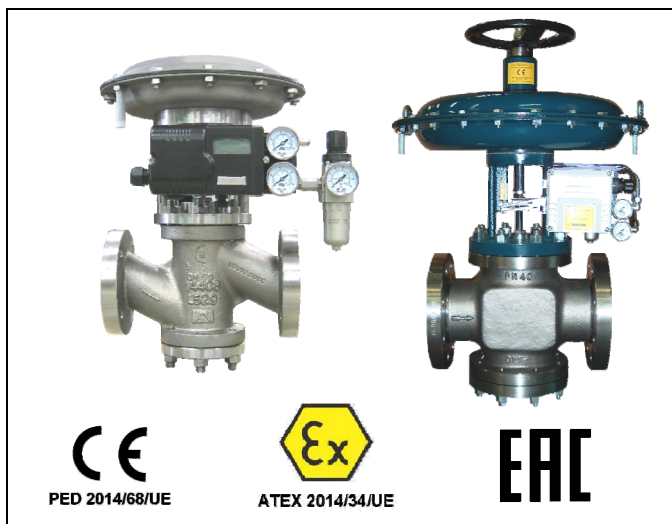

PED 2014/68/UE

ATEX 2014/34/UE

EAC

SIZES : from DN 15 to DN 100

BODY CONNECTIONS : flanged EN 1092-1 form B PN16 PN40
flanged ANSI B 16.5 150 RF 300 RF
flanged JIS B2220 10K 20K

MATERIALS OF BODY GROUP (1) :

- **Cast iron EN-GJL-250 UNI EN 1561 PN 16 ANSI 150 JIS 10**
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- **Carbon steel ASTM A216 WCB PN16/40 ANSI 150/300 JIS10/20**
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- **Stainless steel AISI 316 CF8M PN16/40 ANSI 150/300 JIS10/20**
AISI 316 st. st. trim - AISI 316 st. st. bonnet

PLUG :

- **EQP (DN15-50) EQV (DN65-100)** = equal % class IV°
- **PL (DN15-50) LV (DN65-100)** = linear class IV°
- **PT (DN15-50) VPT (DN65-100)** = quick lift class IV°

BONNET (2) :

- **Standard** : -5 to +200 °C
- **Finned** : > +200 °C
- **Extended** : below -5 °C
- **Bellows sealed** : for thermal oil or hazardous media with
(PN 16 - 25 - 40) standard safety gland arrangement

GLAND ARRANGEMENT (PACKING) (3) with safety "O-rings" :

- PTFE 100% for temperatures ≤ +150 °C
- PTFE 85% + GRAPHITE 15% for temperatures ≤ +200 °C
- PURE GRAPHITE 100% for temperatures from +200° to +400 °C
to be used with finned bonnet

CV = american unit

(flowrate in USGPM with 1 psi of differential pressure)

PLUG		DN15		DN 20		DN25		DN32		DN40		DN50		DN65		DN80		DN100	
Full bore		Ø 1/2"		Ø 3/4"		Ø 1"		Ø 1.1/4"		Ø 1.1/2"		Ø 2"		Ø 2.1/2"		Ø 3"		Ø 4"	
EQP	CV	3.4		6.6		10.8		17		23.8		50		70.2		87.9		118.5	
	KV	2.9		5.7		9.3		14.7		20.5		43		60.5		75.2		102.1	
PL	CV	3.4		6.6		11.2		17.6		23.9		51.2		72.7		89.3		123.8	
	KV	2.9		5.7		9.6		15.2		20.6		44		62.7		77		106.7	
PT	CV	3.4		6.6		12.1		19		24		52.7		107.3		129.3		175.4	
	KV	2.9		5.7		10.4		16.4		20.7		45.3		92.5		111.5		151.2	
Reduced bore *		●		●	½"	½"	¾"	¾"	1"	1"	1.1/4"	1.1/4"	1.1/2"	1.1/2"	2"	2"	2.1/2"	2.1/2"	3"
● DN 15-20		MFP 1/8"		MFP 3/16"		MFP 1/4"		MFP 3/8"		MFS1SG 1/4"		MFS2SG 1/4"		MFS1SG 3/8"		MFS2SG 3/8"			
CV		0.26		0.71		1.28		2.62		0.65		1.21		1.22		2.25			
KV		0.22		0.61		1.10		2.26		0.56		1.04		1.05		1.94			

MFP = Linear..MFS = Equal percentage

* CV and KV values are referred to the selected diameter and plug type (EQP/EQV-PL/LV only)

TYPE 5000 AR DN 15/100
Normally closed – air opens
Face-to-face ASME / ANSI B16.10

DESCRIPTION

The "UNIWORLD" series type 5000 AR are equipped with "straight-through" pattern bodies having ANSI face-to-face dimensions and EN – ANSI – JIS flanges.

Modulating plug suitable for control of virtually all line media.

Compact construction assembled with multisprings pneumatic actuator having 3-15 psi ... 6-18 psi ... 6-30 psi standard control signals.

On request can be equipped with a pneumatic or electro-pneumatic pilot positioner and all accessories.

TECHNICAL CHARACTERISTICS OF PNEUMATIC ACTUATOR :

- Actuator : diaphragm type
- Control signals : 3-15 psi ... 6-18 psi ... 6-30 psi
- Max air supply pressure : 35 psi (2,5 bar)
- Ambient temperature : -20 ... +70 °C *see on request
- Actuator casings material : Fe P11 carbon steel
- Diaphragm material : EPDM 70
- Yoke material : EN-GJS500-7 spheroidal cast iron
- Pneumatic connections : ISO 7 Rp – 1/8"

MAX WORKING CONDITIONS :

- Materials : see general data sheet UNIWORLD/I/E
- Valve Sizing : see general data sheet UNIWORLD/I/E
- Rangeability: see general data sheet UNIWORLD/I/E

ON REQUEST :

- PTFE/GR soft seal ≤ +190°C class VI°
- PTFE soft seal ≤ +150°C class VI°
- Lapping on seat and plug class V°
- Stellite (degree 6°) on seat and plug and guide bush
- Reduced bore (see below table)
- Pneumatic pilot positioner 3-15 psi...3-9 psi...9-15 psi
- Electro-pneumatic pilot positioner 4-20 mA...4-12 mA...12-20 mA
- Air filter regulator
- Proximity limit switches
- 3-way solenoid valve
- Lubricator on finned bonnet for temperatures ≥ +250 °C
- Top-work manual handwheel
- ATEX 2014/34/UE dedicated configuration according to the fluid
- Kit diaphragm and actuator seals certified for a.t. ≥ - 50 °C

Kv = metric unit

(flowrate in m3/h with 1 bar of differential pressure)

CONFLOW s.p.a.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED UNI EN ISO 9001

Via Lecco, 69/71
20864 AGRATE BRIANZA (MB)
Tel. 039/651.705 - 650.397
Mail: sales@conflow.it
www.conflow.it


Actuator type	Signal psi	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
		Stroke 11	Stroke 11	Stroke 11	Stroke 19	Stroke 19	Stroke 19	Stroke 28	Stroke 28	Stroke 28
T200	3-15 psi	12	8	5	3	-	-	-	-	-
	6-18 psi	25	16	9	5.2	-	-	-	-	-
	6-30 psi	65	40	22	11	-	-	-	-	-
T250	3-15 psi	27	17	9	6	4	2.4	-	-	-
	6-18 psi	55	34	19	12	8	3	-	-	-
	6-30 psi	110	68	38	20	14.5	7	-	-	-
T310	3-15 psi	-	-	15.5	10	7	3.5	2.5	1.7	0.9
	6-18 psi	-	-	31	20	14	7	4.2	2.8	1.3
	6-30 psi	-	-	62	30	21	12	6.5	4.7	2.6
T400	3-15 psi	-	-	-	14.5	10.5	5	3.8	2.5	1.4
	6-18 psi	-	-	-	29.5	20.5	12	6.7	4	2.8
	6-30 psi	-	-	-	45	31.5	18	16	11	6.3
T500	3-15 psi	-	-	-	24.5	17.5	9.5	5.5	4.2	2.4
	6-18 psi	-	-	-	49	34.5	19.5	12.2	7	4.9
	6-30 psi	-	-	-	75	52.5	30.3	26	16	10.5
T200 DN15-20 Microflow	Signal	MFP 1/8 "	MFP 3/16 "	MFP 1/4 "	MFP 3/8 "	MFS1SG 1/4 "	MFS2SG 1/4 "	MFS1SG 3/8 "	MFS2SG 3/8 "	
	3-15 psi	200	90	50	30	50	50	30	30	
	6-18 psi	400	180	100	60	100	100	60	60	
	6-30 psi	1300	580	340	160	340	340	160	160	

1. The values given are referred to the force of actuator and they can be used within the limit of the body rating

2. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) are obtained without a residual thrust of air into the actuator

3. The actuator DELTA-PI given in the column 6-30 psi are also valid for ON-OFF service with air supply at 30/35 psi

COMPONENTS LIST AND MATERIALS

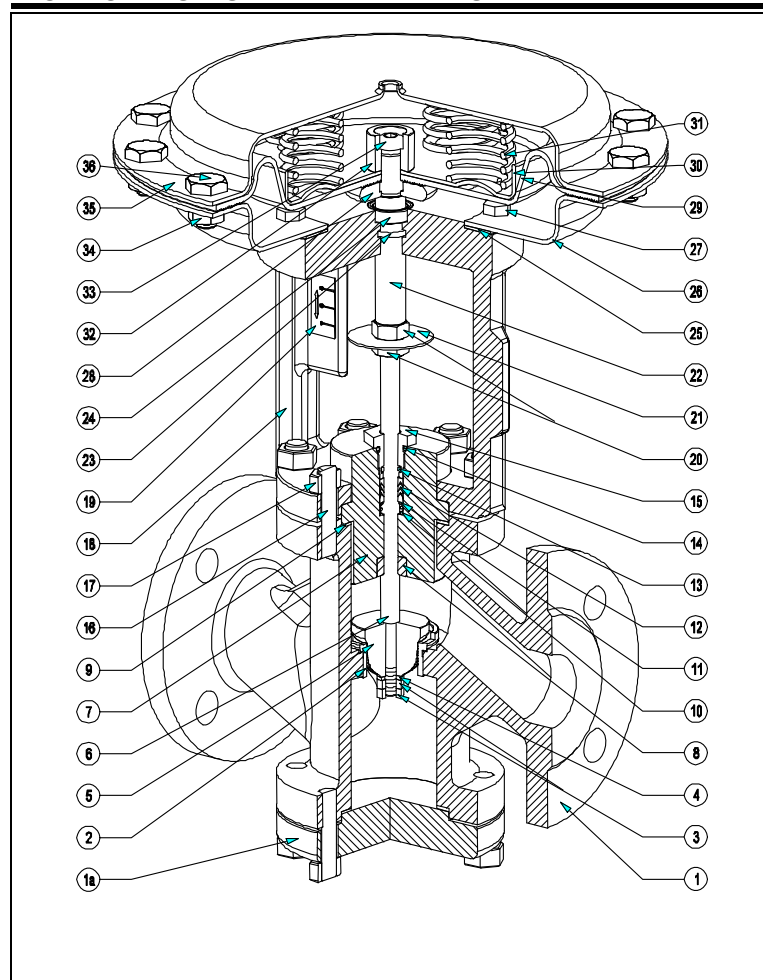


COMPONENTS LIST

- Body
- 1a. Bottom flange
- Seat
- Plug locknuts
- Spring washer
- Plug
- Stem
- Bonnet
- Guide bush
- Body gasket
- Packing spring
- Packing washer
- Packing rings
- Internal "O" ring
- External "O" ring
- Packing adjusting nut
- Stud-bolts
- Body locknuts
- Yoke
- Travel indicator plate
- Position indicator locknuts
- Position indicator
- Diaphragm rod
- "O" ring
- Airtight
- Yoke gasket
- Lower diaphragm casing
- Lower diaphragm casing internal bolts
- Diaphragm spacer
- Diaphragm
- Diaphragm plate
- Springs
- Diaphragm bush
- Diaphragm locknut
- Diaphragm casing bolts
- Upper diaphragm casing
- Diaphragm casing locknuts

MATERIALS

- See note (1) at page 1
- 1a. C40 carbon steel
- AISI 316 stainless steel
- AISI 304 stainless steel
- AISI 304 stainless steel
- AISI 316 stainless steel
- AISI 316 stainless steel
- See note (1)-(2) at page 1
- AISI 304 stainless steel
- Europil WS 3640 or PTFE
- AISI 302 stainless steel
- AISI 304 stainless steel
- See note (3) at page 1
- Viton FPM 70
- Viton FPM 70
- AISI 303 stainless steel
- Galvanized steel
- DIN 934 galvanized steel
- GGG50 spheroidal c. iron
- Policarbonate
- DIN 936 galvanized steel
- Aluminium
- AISI 303 stainless steel
- NBR
- NBR
- Cork - rubber
- P11 steel
- DIN 933 galvanized steel
- Galvanized steel
- EPDM 70
- P01 steel
- C98 UNI 3823
- AISI 303 stainless steel
- ISO 7380 galvanized steel
- DIN 934 galvanized steel
- P11 steel
- DIN 933 galvanized steel

DIMENSIONS in mm.

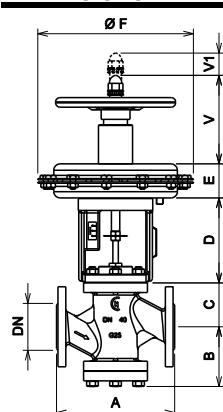

DN	Ø	A(1)	A(2)	B	C - Bonnet			D	V	V1
					Std	Finned	Bellows			
15	1/2 "	184	190	67	49	181	181	147	166	11
20	3/4 "	184	194	67	58	190	190	147	166	11
25	1 "	184	197	90	68	200	200	147	166	11
32	1.1/4 "	200	212	92	70	202	202	147	166	19
40	1.1/2 "	222	235	108	82	214	214	160	166	19
50	2 "	254	267	108	86	218	218	160	166	19
65	2.1/2 "	276	292	148	111	309	309	160	166	28
80	3 "	298	317	148	135	333	333	160	166	28
100	4 "	352	368	176	160	363	363	204	166	28

Actuator	E	Ø F
200	70	210
250	70	292
310	95	336
400	119	408
500	119	520

A(1) cast iron = PN16-ANSI150-JIS10K A(2) carbon and st. steel = PN16-PN40-ANSI150-ANSI300-JIS10K-JIS20K
 Specifications given are only indicative and not binding for the manufacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflo.it.


PNEUMATIC VALVES **UNIWORLD Series**

SINGLE SEAT TWO WAY – CONTROL VALVES

5000AR125200/E

01

2021

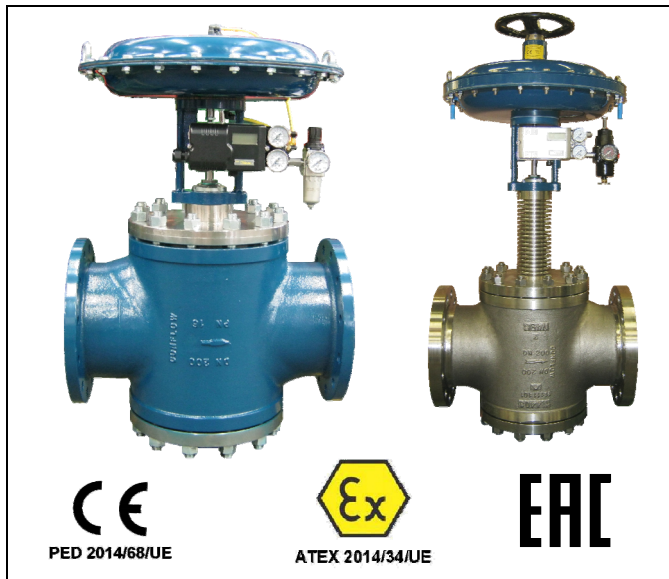

TYPE **5000 AR** DN 125/200

Normally closed – air opens

Face-to-face ASME / ANSI B16.10

DESCRIPTION

The “UNIWORLD” series type 5000 AR are equipped with “straight-through” pattern bodies having ANSI face-to-face dimensions and EN – ANSI – JIS flanges.

Modulating plug suitable for control of virtually all line media.

Compact construction assembled with multisprings pneumatic actuator having 3-15 psi ... 6-18 psi ... 6-30 psi standard control signals.

On request can be equipped with a pneumatic or electro-pneumatic pilot positioner and all accessories.

SIZES : from DN 125 to DN 200

BODY CONNECTIONS : flanged EN 1092-1 form B PN16 PN40
flanged ANSI B 16.5 150 RF 300 RF
flanged JIS B2220 10K 20K

MATERIALS OF BODY GROUP (1) :

- Cast iron EN-GJL-250 UNI EN 1561 PN 16 ANSI 150 JIS 10
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- Carbon steel ASTM A216 WCB PN16/40 ANSI 150/300 JIS10/20
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- Stainless steel AISI 316 CF8M PN16/40 ANSI 150/300 JIS10/20
AISI 316 st. st. trim - AISI 316 st. st. bonnet

PLUG :

- **EQV** = equal % class IV°
- **LV** = linear class IV°
- **VPT** = quick lift class IV°

BONNET (2) :

- Standard : -5 to + 200 °C
- Finned : > +200 °C
- Extended : below - 5 °C
- Bellows sealed : for thermal oil or hazardous media with
(PN 16 - 25 - 40) standard safety gland arrangement

GLAND ARRANGEMENT (PACKING) (3) with safety “0-rings” :

- PTFE 100% for temperatures ≤150 °C
- PTFE 85% + GRAPHITE 15% for temperatures ≤ +200 °C
- PURE GRAPHITE 100% for temperatures from +200° to +400 °C
to be used with finned bonnet

CV = american unit

(flowrate in USGPM with 1 psi of differential pressure)

PLUG		DN125		DN150		DN200	
Full bore		Ø 5"		Ø 6"		Ø 8"	
EQV	CV	234.5		326.1		538	
	KV	202.1		281.1		463.7	
LV	CV	319.1		391.3		624.5	
	KV	275		337.3		538.3	
VPT	CV	355.3		429.8		658.6	
	KV	306.3		370.5		567.7	
Reduced bore *		3"	4"	4"	5"	5"	6"

* CV and KV values are referred to the selected diameter and plug type

TECHNICAL CHARACTERISTICS OF PNEUMATIC ACTUATOR :

- Actuator : diaphragm type
- Control signals : 3-15 psi ... 6-18 psi ... 6-30 psi
- Max air supply pressure : 35 psi (2,5 bar)
- Ambient temperature : -20 ... +70 °C *see on request
- Actuator casings material : Fe P11 carbon steel
- Diaphragm material : EPDM 70
- Yoke material : EN-GJS500-7 spheroidal cast iron
- Pneumatic connections : ISO 7 Rp – 1/8"

MAX WORKING CONDITIONS :

- Materials : see general data sheet UNIWORLD//E
- Valve Sizing : see general data sheet UNIWORLD//E
- Rangeability: see general data sheet UNIWORLD//E

ON REQUEST :

- PTFE/GR soft seal ≤+190°C class VI°
- PTFE soft seal ≤+150°C class VI°
- Lapping on seat and plug class V°
- Stellite (degree 6°) on seat and plug and guide bush
- Reduced bore (see below table)
- Pneumatic pilot positioner 3-15 psi...3-9 psi...9-15 psi
- Electro-pneumatic pilot positioner 4-20 mA...4-12 mA...12-20 mA
- Air filter regulator
- Proximity limit switches
- 3-way solenoid valve
- Lubricator on finned bonnet for temperatures ≥ +250 °C
- Top-work manual handwheel
- ATEX 2014/34/UE dedicated configuration according to the fluid
- Kit diaphragm and actuator seals certified for a.t. ≥ - 50 °C

Kv = metric unit

(flowrate in m3/h with 1 bar of differential pressure)

CONFLOW s.p.a.

COMPANY WITH
QUALITY SYSTEM
CERTIFIED UNI EN ISO 9001

Via Lecco, 69/71
20864 AGRATE BRIANZA (MB)
Tel. 039/651.705 - 650.397
Mail: sales@conflow.it
www.conflow.it


Actuator type	Signal psi	DN125	DN150	DN200
		Stroke 50	Stroke 50	Stroke 50
T400	3-15 psi	0.9	0.65	0.35
	6-18 psi	1.85	1.3	1.05
	6-30 psi	4.5	3.2	1.8
T500	3-15 psi	1.55	1.1	0.95
	6-18 psi	3.1	2.2	1.25
	6-30 psi	5.5	4	2.2

1. The values given are referred to the force of actuator and they can be used within the limit of the body rating

2. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) are obtained without a residual thrust of air into the actuator

3. The actuator DELTA-PI given in the column 6-30 psi are also valid for ON-OFF service with air supply at 30/35 psi

COMPONENTS LIST AND MATERIALS

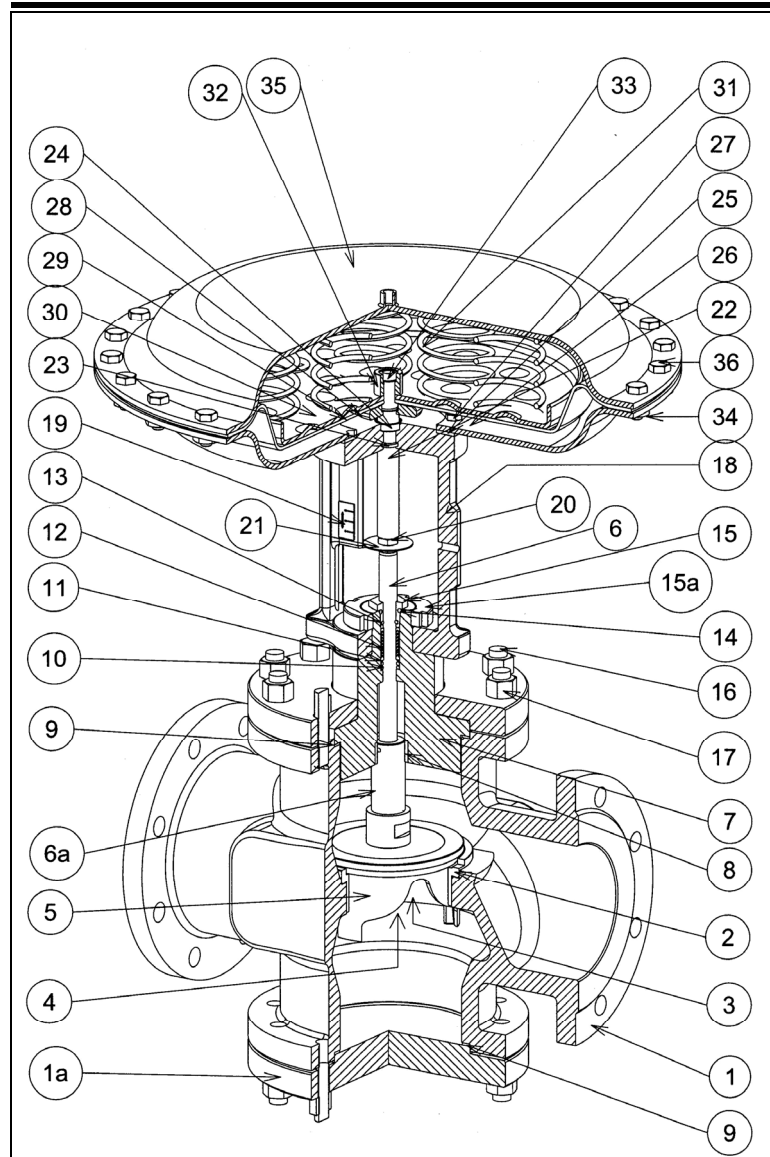


COMPONENTS LIST

1. Body
- 1a. Bottom flange
2. Seat
3. Plug locknuts
4. Spring washer
5. Plug
6. Stem
- 6a. Stem joint
7. Bonnet
8. Guide bush
9. Body gasket
10. Packing spring
11. Packing washer
12. Packing rings
13. Internal "O" ring
14. External "O" ring
15. Packing adjusting nut
- 15a. Yoke adjusting nut
16. Stud-bolts
17. Body locknuts
18. Yoke
19. Travel indicator plate
20. Position indicator locknuts
21. Position indicator
22. Diaphragm rod
23. "O" ring
24. Airtight
25. Yoke gasket
26. Lower diaphragm casing
27. Lower diaphragm casing internal bolts
28. Diaphragm spacer
29. Diaphragm
30. Diaphragm plate
31. Springs
32. Diaphragm bush
33. Diaphragm locknut
34. Diaphragm casing bolts
35. Upper diaphragm casing
36. Diaphragm casing locknuts

MATERIALS

1. See note (1) at page 1
- 1a. C40 carbon steel
2. AISI 316 stainless steel
3. AISI 304 stainless steel
4. AISI 304 stainless steel
5. AISI 316 stainless steel
6. AISI 316 stainless steel
- 6a. AISI 316 stainless steel
7. See note (1)-(2) at page 1
8. AISI 304 stainless steel
9. Europil WS 3640 or PTFE
10. AISI 302 stainless steel
11. AISI 304 stainless steel
12. See note (3) at page 1
13. Viton FPM 70
14. Viton FPM 70
15. AISI 303 stainless steel
- 15a. Steel Class 6
16. Galvanized steel
17. DIN 934 galvanized steel
18. GGG50 spheroidal c. iron
19. Polycarbonate
20. DIN 936 galvanized steel
21. Aluminium
22. AISI 303 stainless steel
23. NBR
24. NBR
25. Cork - rubber
26. P11 steel
27. DIN 933 galvanized steel
28. Galvanized steel
29. EPDM 70
30. P01 steel
31. C98 UNI 3823
32. AISI 303 stainless steel
33. ISO 7380 galvanized steel
34. DIN 934 galvanized steel
35. P11 steel
36. DIN 933 galvanized steel

DIMENSIONS in mm.

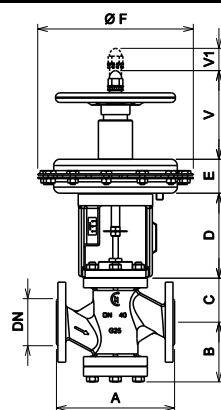

DN	Ø	A(1)	A(2)	B	C - Bonnet			D	V	V1
					Std	Finned	Bellows			
125	5"	403	425	223	252	435	435	213	166	50
150	6"	450	473	229	258	442	442	213	166	50
200	8"	543	568	254	283	465	465	213	166	50

Actuator	E	Ø F
400	144	408
500	144	520

A(1) cast iron = PN16-ANSI150-JIS10K A(2) carbon and st. steel = PN16-PN40-ANSI150-ANSI300-JIS10K-JIS20K
 Specifications given are only indicative and not binding for the manufacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflow.it.