

MULTILOAD II+ LITE

Multiload II+ LITE is a **compact sized** preset designed to control 1-2 arm implementations, **backed by guaranteed Toptech support and reliability.**



OVERVIEW

Reliable, Precise Measurements at an Affordable Price

When you need a compact preset to support up to 2 meters and 4 additives, Multiload II+ LITE supports additive control, product blending, fuel measurement and most loading operations requiring custody transfer of petroleum or petrochemical products or flow control for other high value liquids.

Multiload II+LITE delivers straight product or multi-product "recipes" using ratio, sequential, and various hybrid blending methods. Multiload II+ LITE is used for blending gasoline, biofuels, light oils, and diesel, as well as Liquid Petroleum Gas (LPG), Liquid Natural Gas (LNG), Sustainable Aviation Fuel (SAF) and other chemicals and materials.

KEY BENEFITS

01

Compact and cost-effective – Designed for Zone 1 environments, supporting up to 2 meters and 4 additives. The unit is light weight and compact to reduce engineering and installation costs and complexity.

02

Reliable, easy to implement and maintain – Toptech maintains reliable lead times of 4-6 weeks for delivery. The units are easy to configure, calibrate and maintain, with remote access and troubleshooting tools that minimize disruption.

03

Supported – As an extension of our highly successful family of products, Multiload II+ LITE uses the same firmware as Toptech Systems' premiere Multiload II+, with firmware updates available for download from the website at no cost.

Contact our sales team for more details associated with the varying levels of I/O control

CONTACT US FOR GLOBAL SALES AND SUPPORT




www.toptech.com
TLU - ToptechSales@idexcorp.com

South, Central, and North America
+1 (407) 332-1774
EMEA, Asia, and Oceania
+32 (0)3 250 60 60

SPECIFICATIONS

- ☑ Compact – 7kg
25 x 25 x 12 cm
- ☑ Durable 17.78cm color screen
- ☑ Simplified and rugged keypad
- ☑ Expandable I/O using FCMs
- ☑ Ambient temperature range -40C to +60C
- ☑ Voltage – 100-240 VAC
- ☑ Flexible communications with 1 ethernet port and 3 serial ports

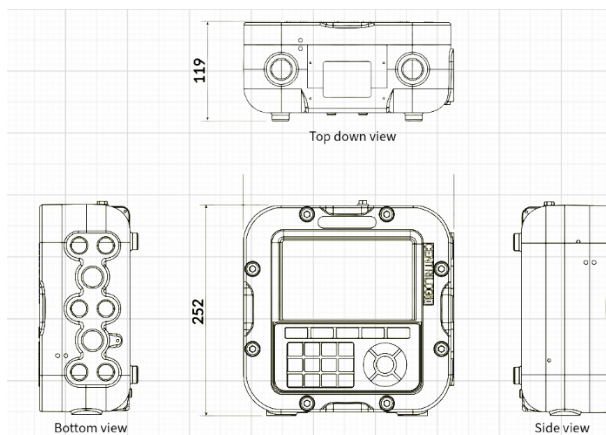

MULTILOAD II+LITE - Options

Meter	Additives	Blending
1 meter	2 additives	Sequential blending only
2 meter	2 additives	All blending options
2 meter	4 additives	All blending options

AN INDUSTRY LEADER IN AUTOMATION AND DATA MANAGEMENT

Toptech Systems is a global industry leader in automation and data management services. All of our products are designed in-house allowing us to provide excellent customer service to our clients at all levels of the supply

"Toptech equipment is compact, robust, and the technology is user-friendly and easy to understand."

- Benjamin Romero,
Gerente de Operaciones Terminal, UNO Honduras



CONTACT US FOR GLOBAL SALES AND SUPPORT



www.toptech.com
TLU - ToptechSales@idexcorp.com

South, Central, and North America
+1 (407) 332-1774
EMEA, Asia, and Oceania
+32 (0)3 250 60 60