
## Datasheet of Reference



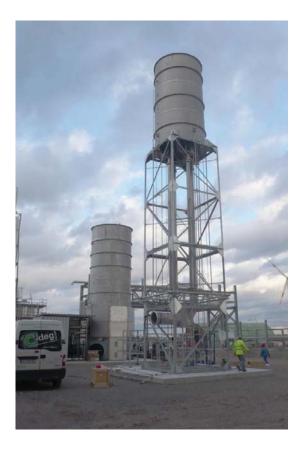

Type: Combustion capacity: Equipment: LTF, biogas emergency flares 50 kW – 60 MW (or more, on request) open combustion (flame visible), integrated ATEX blower, gas train enclosure

Our LTF emergency flares (with visible flame) are the simple version of our biogas flares. They can be used if space and flame visibility is not an issue.

Their advantage is the low price despite the complete safety equipment.

Small standard sizes are available, but for every biogas application a tailor-made solution can be delivered.

Each flare is equipped with one or more burners circles, depending on the desired output control range.

Please ask our experts for your personal offer.

C-deg environmental engineering GmbH – Grasweg 35 – D-24118 Kiel – Tel. +49 431 22017-0 – Fax +49 431 22017-77 info@c-deg.eu – www.c-deg.eu