



Super Micro Flowmate FLOWMATE (OVAL M-III)

GENERAL SPECIFICATION
GS.No.GBB340E-16

■ GENERAL

Designed for monitoring fuel consumption of combustion appliances and heaters or elsewhere where small flow measurement is desired, the FLOWMATE (OVAL M-III) is a compactly built liquid service OVAL flowmeter dedicated to remote control with a pulse generator. Meter size 38 (resin body) intended for water and pure water applications is a new addition to this series, expanding the application range for small flow metering.

■ FEATURES

1. Compact configuration with built-in pulse generator.
2. Simple and firm construction plus inexpensive.
3. Remote totalizing counter displays actual throughput of flow to be utilized for monitoring and controlling of fuel consumption in various types of instruments.
4. Multiple flow control systems can be made-up being combined with versatile flow control elements such as pump and valves, i.e: proportional injection of additives in fine chemical processes.
5. Ideal for fuel cell applications or other low to micro flow measurement.

■ GENERAL SPECIFICATIONS

● Flow Range

Unit in L/h

Viscosity Meter size	Water	More than 0.3mPa·s and less than 0.8mPa·s	More than 0.8mPa·s and less than 2.0mPa·s	More than 2.0mPa·s and less than 5.0mPa·s	More than 5.0mPa·s and less than 200mPa·s	More than 5.0mPa·s and less than 1000mPa·s	Rotor Material
Super Micro 38	0.09 to 3						PEEK resin
Super Micro 39			0.12 to 6	0.12 to 6			PPS resin
40		1.5 to 50	1.0 to 50	0.7 to 50	0.5 to 50		Special resin
41		3.0 to 100	2.0 to 100	1.5 to 100	1.0 to 100		Special resin
45		7.0 to 100	4.0 to 100	2.0 to 100	1.0 to 100		Stainless Steel
		10.0 to 500	7.0 to 500	4.0 to 500	2.5 to 500		Special resin
		25.0 to 500	15.0 to 500	7.0 to 500	3.5 to 500		Stainless Steel

● Meter Body

Item	Description					
Meter size	Super Micro 38 *1	Super Micro 39	40	41	45	
Nominal size	R 1/4	Rc1/4 (With the fitting furnished.)	Rp 1/8 (6mm)	Rp 1/8 (6mm)	Rp 1/4 (8mm)	
Accuracy	0.09 to less than 0.18 L/h $\pm 10\%$ RD 0.18 to 3 L/h $\pm 3\%$ RD	0.12 to less than 0.3 L/h $\pm 8\%$ RD 0.3 to 6 L/h $\pm 3\%$ RD				$\pm 1\%$ RD
Operating temp. range	-10 to +60°C		-20 to +80°C			
Max. operating press.	0.3MPa	0.49MPa				0.98MPa
Material *2	Body P	C	L K	C K	C K	L C C K K C
	Rotors P	P				

*1 Acceptable physical orientation of meter size 38 is from bottom to top only in the pipeline.

*2 Material C : Stainless steel (Body : SUS316, Rotor : SUS316L (Sintered metal))


L : Aluminum + Alumite treatment

K : Special resin

P : PPS resin (For measurement of other than water, purified water and oils, consult the factory.) Model 39 only

P : PEEK resin (For measurement of only water, purified water) Model 38 only

NOTE: Body material with code "L" is not serviceable with water and corrosive liquids.

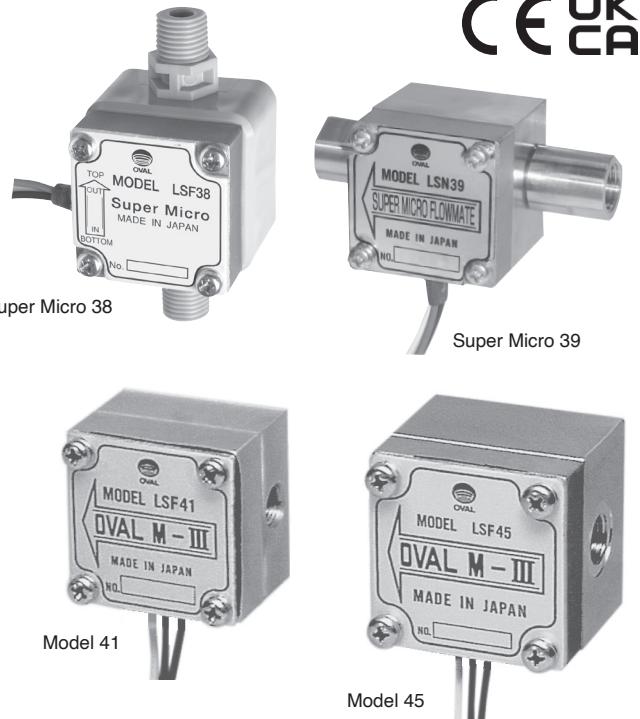

OVAL Corporation

<https://www.oval.co.jp/english>

Head Office (Tokyo): Tel. +81 3-3360-5121 Fax. +81 3-3365-8605
Overseas Branch Offices: Beijing, Seoul, Singapore, Taipei

● Pulse Generator

1. MR sensor (standard)

Item	Description	
	Model 38	Model 39, 40, 41, 45
Detection method	Magnetic sensor	
Response frequency	Max.1000Hz	
Ambient temp. range	-20 to +80°C	
Output pulse	Voltage pulse 0/1=Max. 1VDC/ [Supply voltage] -Min. 2VDC (at load resistance Min.10kΩ) [Supply voltage] —————— Max. 1VDC ——————	Voltage pulse : 0/1=Max. 0.5VDC/6.2 to 7.6VDC (at load resistance Min.10kΩ) 6.2 to 7.6VDC —————— Max. 0.5VDC ——————
	Wave form ratio (%) $4.0 \leq \frac{H}{H+L} \times 100 \leq 65.0$	
Transmission distance	Max. 1km (Cable : CVVS 1.25 to 2sq.)	
Power supply	12 to 24VDC±10%	
Power consumption	Max. 10mA (Max 0.3W)	

Output Pulse Unit

Meter size	Scaled pulse		Unscaled pulse		Max. Flowrate L/h
	Pulse Unit mL/P	Freq. at Max. Flowrate Hz	Meter Factor mL/P	Freq. at Max. Flowrate Hz	
Super Micro 38	—	—	0.0550	15.2	3
Super Micro 39	—	—	0.161	10.4	6
40	1	13.9	0.25	55.6	50
41	1	27.8	0.5	55.6	100
45	10	13.9	2.5	55.6	500

2. Reed Switch (Option: Except for Size 38 or 39)

Item	Description	
Max. operating voltage	AC : 45V, DC : 45V	
Contact capacity	10W or 0.5A	
Electric durability	DC : 250V RMS 1min.	
Output pulse	Contact pulse (Unscaled pulse only)	
Ambient temperature	-20 to +85°C (at less than 90%RH)	

Output Pulse Unit


Meter size	Unscaled pulse		Max. Flowrate L/h
	Meter Factor mL/P	Freq. at Max. Flowrate Hz	
40	0.5	27.8	50
41	1.0	27.8	100
45	5.0	27.8	500

■ APPLICABLE STANDARDS


Pulse Generator Type	MR Sensor	Reed Switch
Applicable Standards	EN IEC63000 EN61326-1	EN IEC63000

To meet compliance requirements of EMC for the MR sensor type only, a lightning protector (M SYSTEM: MDP-SP or equiv.) must be used.

■ METER ERROR AND PRESSURE DROP

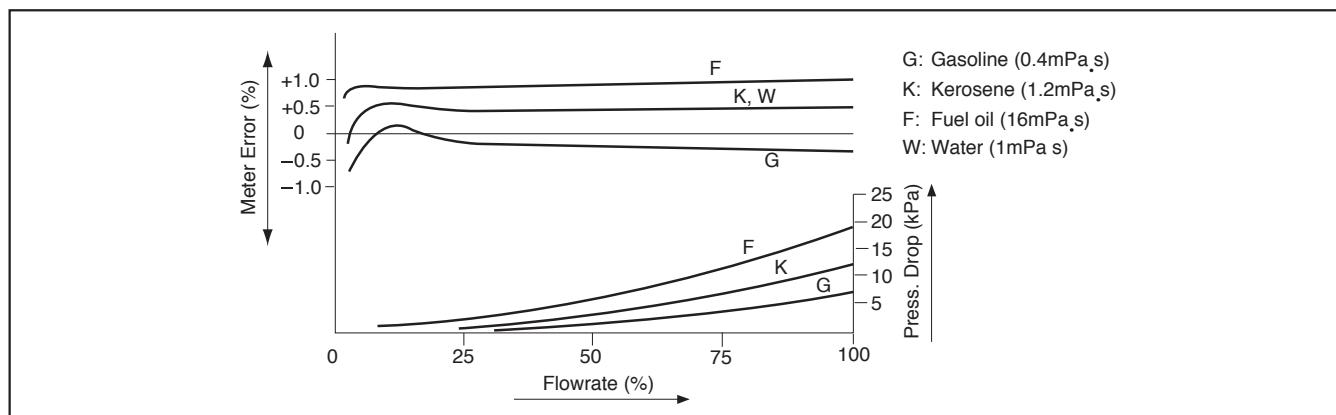

■ COMBINATION WITH RECEIVING INSTRUMENTS

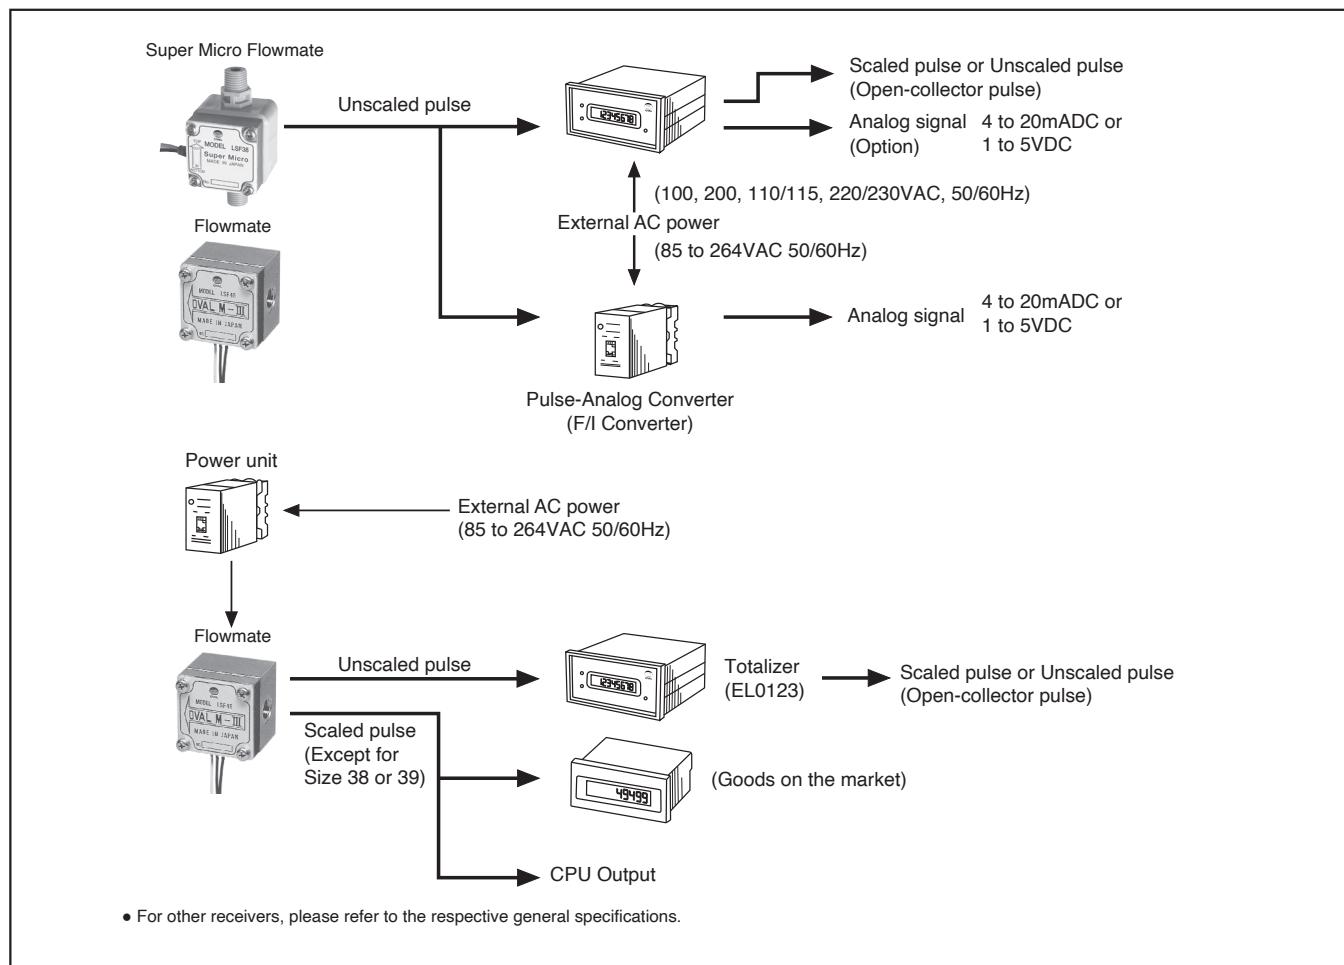

■ PRODUCT CODE EXPLANATION

• Main code

Item	Code. No.									Description	Combination				
	①	②	③	④	⑤	⑥	⑦	-	⑧	⑨	38	39	40	41	45
Kind	L	S	F												
Model	OVAL M-II										○	○	○	○	○
	3	8								R 1/4 male	○				
	3	9								G 1/8		○			
	4	0								Rp 1/8 (6mm)			○		
	4	1								Rp 1/8 (6mm)				○	
Material of Metering elements	4	5								Rp 1/4 (8mm)					○
	P									Body (P) + Rotor (P: PEEK resin) Size 38 only	○	x	x	x	x
	P									Body (C) + Rotor (P: PPS resin) Size 39 only	x	○	x	x	x
	C									Body (C) + Rotor (C)	x	x	x	○	○
	L									Body (L) + Rotor (K)	x	x	○	○	○
Connection (connector)	P									Body (C) + Rotor (K)	x	x	○	○	○
	0									No connector	○	○	○	○	○
Generation	8									W/connector (option) (※1)	x	○	x	x	○
	M									MR sensor	○	○	○	○	○
Kind of pulse	R									Reed switch (option)	x	x	○	○	○
	1									Unscaled pulse	○	○	○	○	○
	2									Scaled pulse (MR sensor only)	x	x	○	○	○

※1: Connector of meter size 39 is only G1/8-Rc1/4.

Connector of meter size 45 can be selected from the additional code below.

Please contact OVAL or the nearest representative if you require a connector other than the additional code.

Note ○ : Available


x : Not available

• Additional code

Connector			
S	W	0	No connector
S	W	1	R1/4xR 1/4
S	W	2	R1/4xNPT1/4 internal thread
S	W	3	R1/4xφ9 hose connector


■ OUTLINE DIMENSIONS (Unit in mm)

- Super Micro Flowmate (size 38)

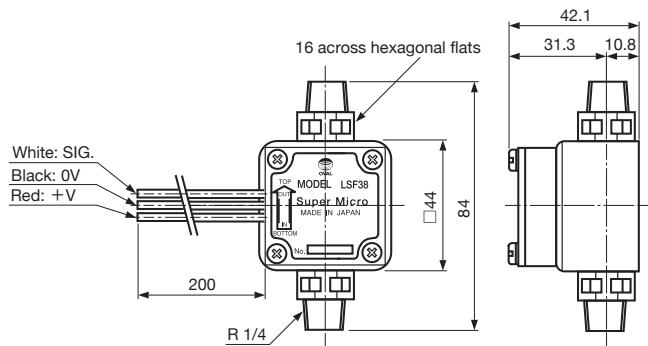


Note: For meter size 38, prepare a strainer (mesh #300).

- Super Micro Flowmate (size 39)

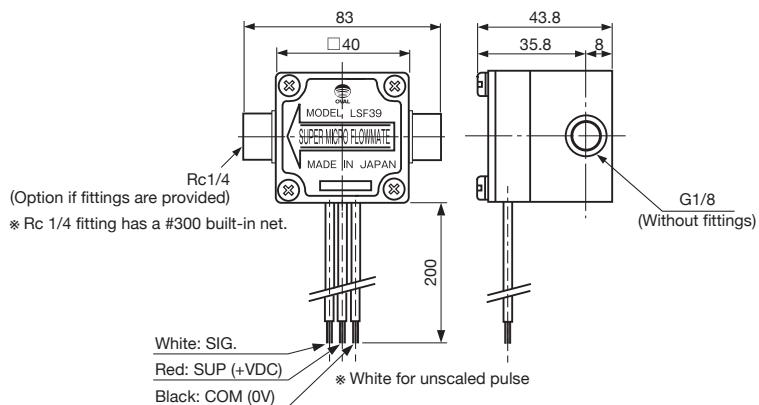


Note: For meter size 39 requires a strainer if fittings are not provided.


- Meter size 40, 41

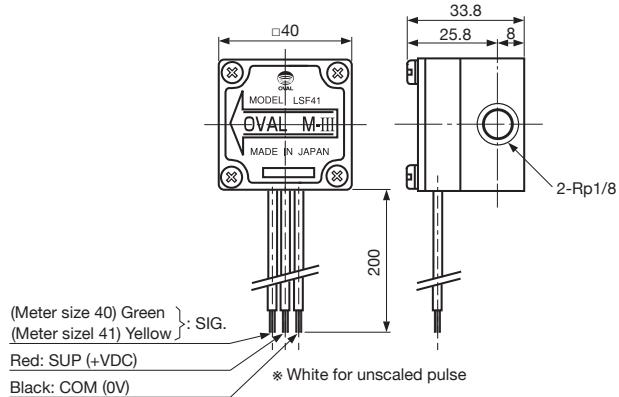

- Meter size 45

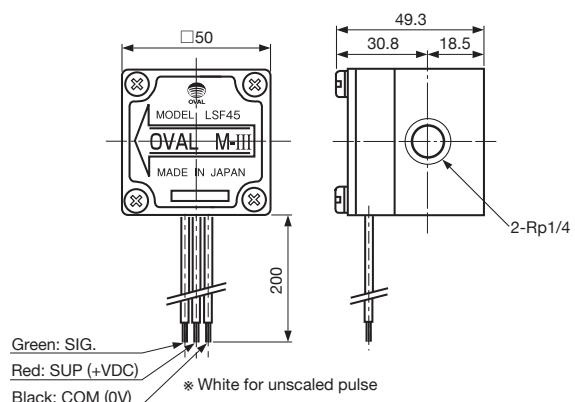

- Measurements

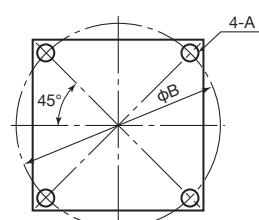

MODEL	A	B	Screw depth
39	M4	45	6
40	M4	45	6
41	M4	45	6
45	M5	56	15

■ STRAINER

• YS12, 13 and YS22, 23

Applicable meter sizes: 40, 41 and 45


Max. operating pressure: 1.96MPa

Body material: FCD450 (ductile cast iron) *Material: H
SCS14A (stainless steel) *Material: C

Net material: SUS304 (stainless steel) *Material: H
SUS316 (stainless steel) *Material: C

Finish: gray (Applied only for Material H)

• Outline (Material: H, C)

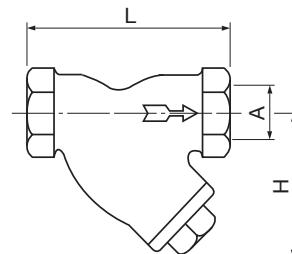

• Dimension

Unit in mm

Item	Nominal size A	Material	L	H (approx.)	Net mesh No.
YS12	Rc1/8 (6mm) *1	H	110 *3	60	200
YS13	Rc1/4 (8mm)		80		
YS22	Rc1/8 (6mm) *1	C *2	100 *3	50	200
YS23	Rc1/4 (8mm)		70		

*1: Meter sizes 40 and 41 with R1/4xRc1/8 bushings. (Bushings are contained in the same package as the strainer)

*2: Can be used with fluid viscosities up to 10mPa·s.

Please consult us if the viscosity exceeds 10mPa·s.

*3: Dimensions with bushing installed (for reference purpose)

• Product code

Item	Code No.					Description
	①	②	③	④	⑤	
Model	Y	S				M-III strainer
Nominal size		1	2			Rc 1/8 (Meter size 40, 41)
		1	3			Rc 1/4 (Meter size 45)
Material			H			FCD450

Item	Code No.					Description
	①	②	③	④	⑤	
Model	Y	S				M-III strainer
Nominal size		2	2			Rc 1/8 (Meter size 40, 41)
		2	3			Rc 1/4 (Meter size 45)
Material			C			SCS14A

The specification as of October, 2025 is stated in this GS Sheet. Specifications and design are subject to change without notice.

Sales Representative:

GS No.GBB340E		
初版	改訂	印刷
95.01	25.10	